


Sigen Battery 5.0 / 8.0 kWh


SigenStor BAT	5.0	8.0	Units
Performance Specification			
Battery type	LiFePO ₄		
Total energy capacity	5.38	8.06	kWh
Usable energy capacity*	5.2	7.8	kWh
Battery modules voltage range (single phase system)	300 ~ 600		V
Battery modules voltage range (three phase system)	600 ~ 900		V
Max. charge / discharge power	2500	4000	W
Peak charge / discharge power (10 seconds)	3750	6000	W
General Data			
Weight	57	73	kg
Dimensions (W / H / D)	767 / 270 / 260		mm
Storage temperature range	-25 ~ 60		°C
Operating temperature range	-20 ~ 55		°C
Relative humidity range	5% ~ 95%		
Max. operating altitude	4000		m
Cooling	Natural convection		
Ingress protection rating	IP66		
Noise emission	< 30		dB
Installation method	Floor standing / Wall-mounted		

* Test conditions: 100% depth of discharge, 0.2C rate charge & discharge averagely at 25°C.

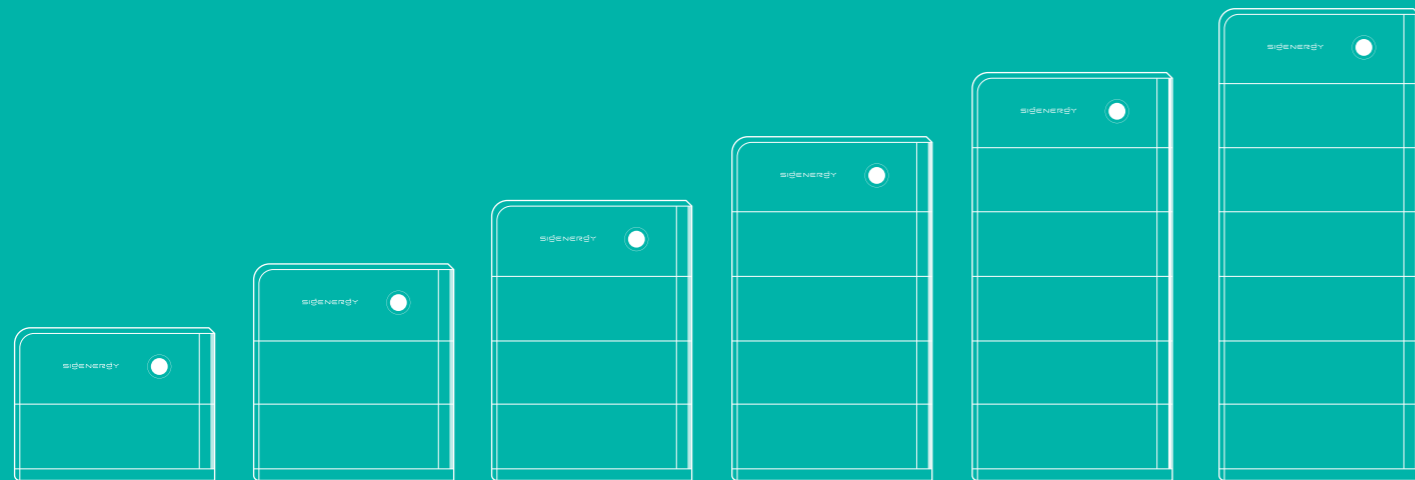

SigenStor

ENJOY GREEN ENERGY

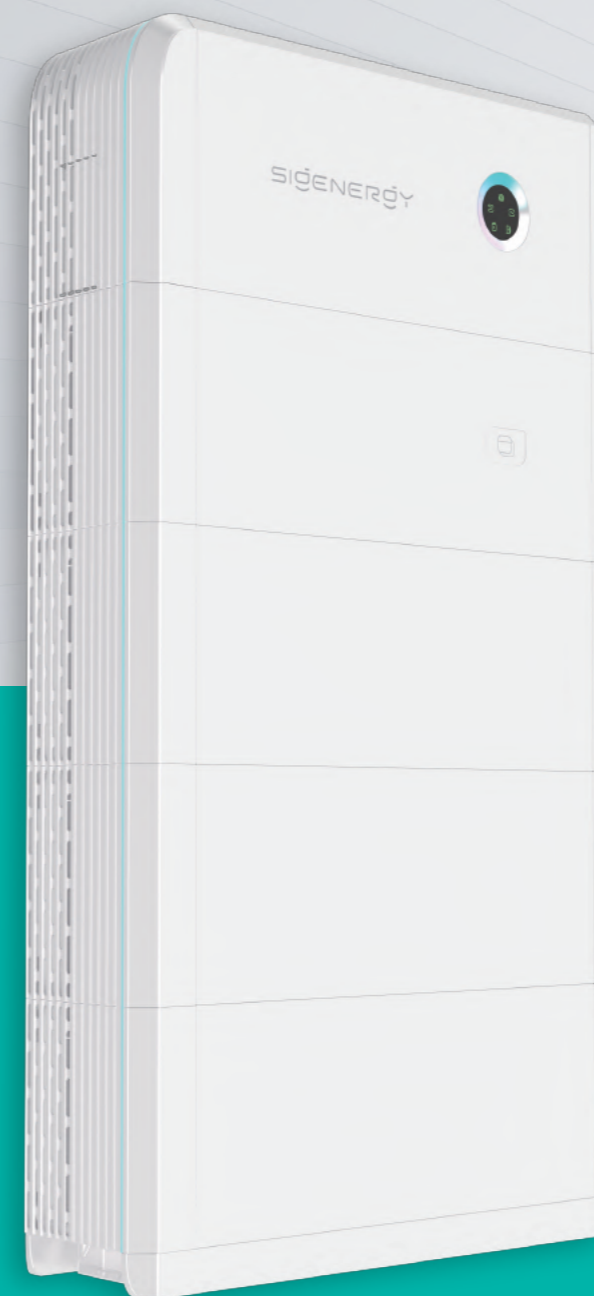

- ▶ Sigen Energy Controller
- ▶ Sigen EV DC Charging Module
- ▶ Sigen Battery

 **Simple**

 **Robust**

 **Versatile**

 **Intelligent**

Sigenenergy is leading a new way of producing, storing, transferring, and consuming home energy. We provide a genuine all-in-one solar energy storage system, SigenStor. Its unique 5-in-1 modular design integrates Solar Inverter, EV DC Charger, Battery PCS, Battery Pack, and EMS into one intelligent home energy system. Simple, robust and versatile, it will be a great addition to your home.

Sigen Energy Controller 3.0–6.0 kW Single Phase

SigenStor EC	3.0 SP	3.6 SP	4.0 SP	4.6 SP	5.0 SP	6.0 SP	Units
DC Input (from PV)							
Max. PV power	6000	7360	8000	9200	10000	12000	W
Max. DC input voltage			600				V
Nominal DC input voltage			350				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Output (on-grid)							
Nominal output power	3000	3680	4000	4600	5000	6000	W
Max. output apparent power	3300	3680	4400	5000	5500	6600	VA
Nominal output current	13.6	16.0	18.2	20.9	22.7	27.3	A
Max. output current	15.0	16.0	20.0	22.7	25.0	30.0	A
Nominal output voltage			220 / 230 / 240				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
Efficiency							
Max. efficiency			98.0%				
European efficiency	97.0%	97.1%	97.2%	97.3%	97.4%	97.4%	
AC Output (backup)							
Peak output power (10 seconds)	4500	5520	6000	6900	7500	9000	W
Nominal output voltage			220 / 230 / 240				V
Nominal output frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total voltage harmonic distortion			THDv < 2%				
Switch time to backup mode			5*				ms
Battery Connection							
Battery module models			SigenStor BAT 5.0 / 8.0				
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			300 ~ 600				V
General Data							
Dimensions (W / H / D)			700 / 300 / 245				mm
Weight			18				kg
Storage temperature range			-40 ~ 70				°C
Operating temperature range			-30 ~ 60				°C
Relative humidity range			0% ~ 95%				
Max. operating altitude			4000				m
Cooling			Natural convection				
Ingress protection rating			IP66				
Noise emission			< 30				dB

* Need to be used together with Sigen Energy Gateway + Sigen Battery.

Sigen Energy Controller 5.0–25.0 kW Three Phase

Preliminary

SigenStor EC	5.0 TP	6.0 TP	8.0 TP	10.0 TP	12.0 TP	15.0 TP	17.0 TP	20.0 TP	25.0 TP	Units
DC Input (from PV)										
Max. PV power	8000	9600	12800	16000	19200	24000	27200	32000	40000	W
Max. DC input voltage					1100					V
Nominal DC input voltage					600					V
Start-up voltage					180					V
MPPT voltage range					160 ~ 1000					V
Number of MPP. trackers		2			3			4		
Number of PV strings per MPPT					1					
Max. input current per MPPT					16					A
Max. short-circuit current per MPPT					20					A
AC Output (on-grid)										
Nominal output power	5000	6000	8000	10000	12000	15000	17000	20000	25000	W
Max. output apparent power	5500	6600	8800	11000	13200	16500	18700	22000	27500	VA
Nominal output current	7.6	9.1	12.2	15.2	18.2	22.8	25.8	30.4	38.0	A
Max. output current	8.4	10.0	13.4	16.7	20.1	25.1	28.4	33.4	41.8	A
Nominal output voltage					380 / 400					V
Nominal grid frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total current harmonic distortion					THDi < 2%					
Efficiency										
Max. efficiency					98.5%					
European efficiency					98.0%					
AC Output (backup)										
Peak output power (10 seconds)	7500	9000	12000	15000	18000	22500	25500	30000	30000	W
Nominal output voltage					380 / 400					V
Nominal output frequency					50 / 60					Hz
Power factor					0.8 leading ~ 0.8 lagging					
Total voltage harmonic distortion					THDv < 2%					
Switch time to backup mode					5*					ms
Battery Connection										
Battery module models					SigenStor BAT 5.0 / 8.0					
Number of modules per controller					1 ~ 6					pcs
Battery module voltage range					600 ~ 900					V
General Data										
Dimensions (W / H / D)					700 / 300 / 260					mm
Weight					30					kg
Storage temperature range					-40 ~ 70					°C
Operating temperature range					-30 ~ 60					°C
Relative humidity range					0% ~ 95%					
Max. operating altitude					4000					m
Cooling					Smart air cooling					
Ingress protection rating					IP66					
Noise emission					< 45					dB

* Need to be used together with Sigen Energy Gateway + Sigen Battery.